


Performance with Precision

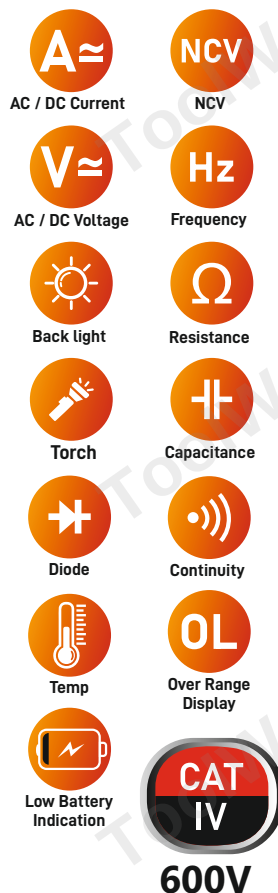

- ☒ **3⁵/₆ DIGIT MULTIMETER**
- ☒ **5,999 COUNT**
- ☒ **AUTO RANGE**
- ☒ **AUTO POWER OFF : 15 MIN.**
- ☒ **MAX/MIN HOLD**
- ☒ **DUAL LCD WITH BARGRAPH**
- ☒ **LIVE TEST (SOUND AND LIGHT ALARM)**
- ☒ **NCV**
- ☒ **TRUE RMS**
- ☒ **DOUBLE COLOUR BACKLIGHT**
- ☒ **INPUT JACK LED INDICATOR**
- ☒ **SAMPLING RATE: 3 TIMES/SECOND**
- ☒ **INPUT POLARITY INDICATION:
AUTOMATICALLY DISPLAY " " "**

RANGE	RESOLUTION	ACCURACY
600mV	0.1mV	±0.5% of rdg ±3 digits
6V	0.001V	
60V	0.01V	
600V	0.1V	
1000V	1V	

RANGE	RESOLUTION	ACCURACY
600μA	0.1μA	±1.2% of rdg±3 digits
6000μA	1μA	
60mA	0.01mA	
600mA	0.1mA	
10A	0.01A	

RANGE	RESOLUTION	ACCURACY
10Hz	0.001 Hz	±1.0% of rdg±3 digits
100Hz	0.01Hz	
1000Hz	0.1Hz	
10kHz	0.001kHz	
100kHz	0.01kHz	
1000kHz	0.1kHz	
10MHz	0.001MHz	±3.0% of rdg±3 digits
1~99%	0.1%	

RANGE	RESOLUTION	ACCURACY
600mV	0.1mV	±0.8% of rdg ±5 digits
6V	0.001V	
60V	0.01V	
600V	0.1V	
750V	1V	

RANGE	RESOLUTION	ACCURACY
600μA	0.1μA	±1.5% of rdg±3 digits
6000μA	1μA	
60mA	0.01mA	
600mA	0.1mA	
10A	0.01A	

RANGE	RESOLUTION	ACCURACY	
°C	1°C	-20°C~0°C	±5.0% rdg or ±3°C
		0°C~400°C	±1.0% rdg or ±2°C
		400°C~1000°C	±2.0% rdg
°F	1°F	-4°F~32°F	±5.0% rdg or ±6°F
		32°F~752°F	±1.0% rdg or ±4°F
		752°F~1832°F	±2.0% rdg

- **SAMPLING RATE** : Approx 3 times / Sec.
- **AUTO POWER OFF** : After 15 mints.
- **INPUT POLARITY** : Automatically Display.

RANGE	RESOLUTION	ACCURACY
600Ω	0.1Ω	±1.0% of rdg±3 digits
6kΩ	0.001Ω	
60kΩ	0.01kΩ	
600kΩ	0.1kΩ	
6MΩ	0.001MΩ	±1.5% of rdg±3 digits
60MΩ	0.01MΩ	

RANGE	RESOLUTION	ACCURACY
10nF	0.001nF	±4.0% of rdg±5 digits
100nF	0.01nF	
1000nF	0.1nF	
10μF	0.001μF	
100μF	0.01μF	
1000μF	0.1μF	
10mF	0.001mF	±5.0% of rdg±5 digits
100mF	0.01mF	

Dimension	: H190 x W88 x D53 mm
Weight	: Approx. 290 Gms.
Accessories	: Test Leads, Sheath, TP04 Thermocouple, Manual & Battery .
Qty	: 40 Pcs. in a Box.